




电气特性 Electrical

额定电流 (Current rating) : 3A
 接触电阻 (Contact resistance) : 10m
 绝缘电阻 (Insulation resistance) : 5000M
 耐电压 (Withstanding voltage) : 1000 V r.m.s

机械特性 Mechanical

插入力 (Insertion force) : 5.0N/pin
 拔出力 (Extraction force) : 0.3N/pin
 适用环境 (Operating temperature) : -55 to +125

1403-XXX-XX-X

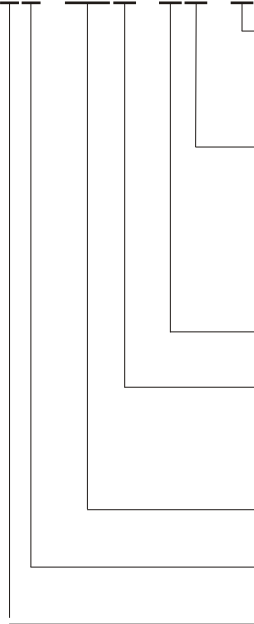

塑胶材料及颜色
 (Insulator material and color)
 1: 黑色 (Black) PBT+30%GF UL94V-0
 2: 绿色 (Green) PBT+30%GF UL94V-0
 9: 蓝色 (Blue) PBT+30%GF UL94V-0

触点镀层 (Contacts plating)

代码 (Code)	定义 (Definition)
2	CLASS I
3	CLASS II
4	CLASS III
5	CLASS IV

安装类型 (Mounting options)
 安装类型详见附录 (See appendix)

连接器类型 (Connector type)

代码 (Code)	定义 (Definition)
1	插头 (Male)
2	插座 (Female)

触点数量 (Number of contacts)
 15, 26, 44, 62, 78
高密度线缆焊接型
 (High density solder cup)
 0: 冲床PIN (Punch Pin)

插头各规格尺寸表 Male dimensions

No. of contact	A	B	C	D	E	F	G	H
15M	16.92	25.00	30.80	19.20	8.30	12.50	10.70	2.29
26M	25.25	33.30	39.20	27.70	8.30	12.50	10.70	2.29
44M	38.96	47.04	53.04	41.10	8.30	12.50	10.70	2.29
62M	55.42	63.50	69.40	57.30	8.30	12.50	10.70	2.41
78M	52.68	61.10	67.00	55.10	10.95	15.30	13.56	2.41

插座各规格尺寸表 Female dimensions

No. of contact	A	B	C	D	E	F	G	H
15F	16.35	25.00	30.80	19.20	7.90	12.50	10.70	2.29
26F	24.66	33.30	39.20	27.70	7.90	12.50	10.70	2.29
44F	38.40	47.04	53.04	41.10	7.90	12.50	10.70	2.29
62F	53.30	63.50	69.40	57.30	7.90	12.50	10.70	2.41
78F	52.55	61.10	67.00	55.10	10.87	15.30	13.56	2.41

