



250 Miniature Slide Switches



INSULATION RESISTANCE: 1,000 MΩ UNDER 500V
 DIELECTRIC STRENGTH: BETWEEN CONTACTS 1000V BETWEEN CONTACTS AND NEUTRAL POINT 2000V EFF. 50Hz□
 TEMPERATURE OF USE: -40°C to +85°C□
 MECHANICAL LIFE: SILVER 20000 OPERATIONS (GOLDEN BRASS 20000 OPERATION)□
 BREAKING CAPACITY:
 SILVER CONTACTS: 1A 250V
 GOLD CONTACTS: 10mA 5V- 10mA 50MV
 INITIAL CONTACT-RESISTANCE: SILVER < 10 MΩ
 GOLD: 50 MΩ

How do you build the switches you need!!




H 2 5 1 A - Q - 3 E -

Switches TYPE		Terminal Pitch		Contact		Epoxy seal		RoHS code	
H251	SPDT high actuator	A	2.54	Q	silver	(none)	none seal	□	= none
F251	SPDT flush actuator	B	5.08	R	gold	3E	epoxy seal	H	= RoHS Compliant
H502 □	DPDT high actuator □								
F502	DPDT flush actuator								

SPDT



Model No.	spacing	Switching position		
		ON	NONE	ON
H251A	2.54	ON	NONE	ON
H251B	5.08	ON	NONE	ON
Term. Comm.		2-3	open	2-1



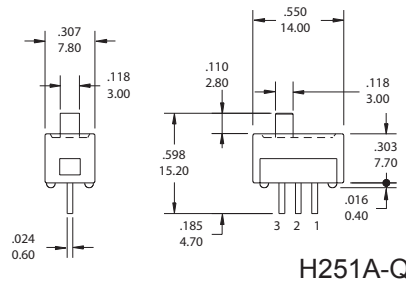


H251A-Q

SPDT



Model No.	spacing	Switching position		
		ON	NONE	ON
F251A	2.54	ON	NONE	ON
F251B	5.08	ON	NONE	ON
Term. Comm.		2-3	open	2-1



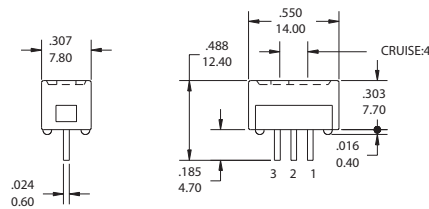


F251A-Q

DPDT




Model No.	spacing	Switching position		
		ON	NONE	ON
H502A	2.54	ON	NONE	ON
H502B	5.08	ON	NONE	ON
Term. Comm.		2-3,5-6	open	2-1,5-4



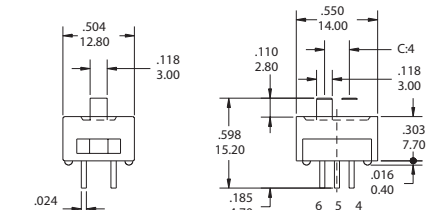


H502A-Q

DPDT



Model No.	spacing	Switching position		
		ON	NONE	ON
F502A	2.54	ON	NONE	ON
F502B	5.08	ON	NONE	ON
Term. Comm.		2-3,5-6	open	2-1,5-4

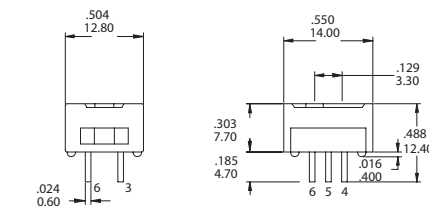

CONTACT MATERIAL OPTIONS

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
Q	Silver plated	Silver plated	3 A @ 120V AC or 28 V DC; 1 A @ 250 VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX