






SCHEMATIC



P.C.B. LAYOUT

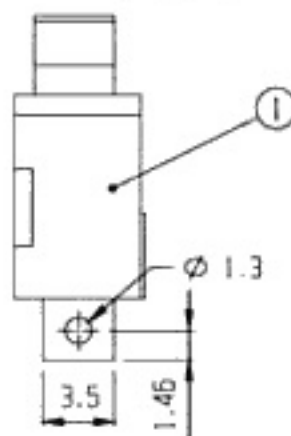

RoHS
Compliance

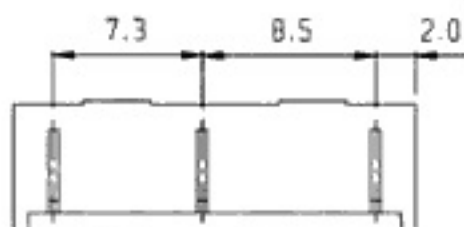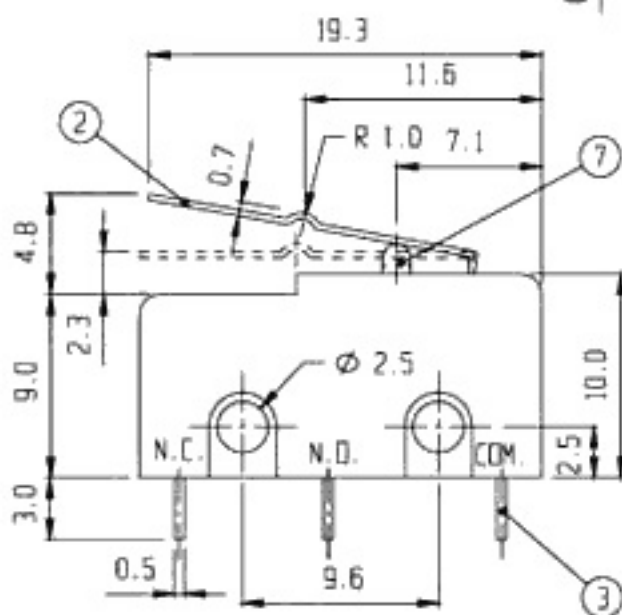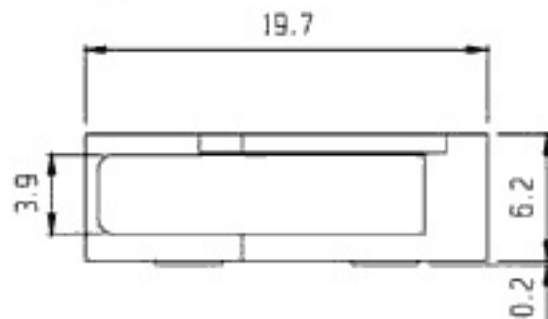

OPERATION FORCE

MS-104-01	25g±10g
MS-104-02	40g±15g

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	PUSH BOTTON	P O M	1		6	SPRING PLATE	P B S	1	
5	CONTACT POINT	Ag	1		4	CONTACT	P B S	1	
3	TERMINAL	BRASS	3	Ag PLATED	2	KNOB	S U S	1	
1	FRAME	P O M	1						

ISSUED

SPECIFICATION

TITLE: MICRO SWITCH

RATING: AC 125V 1A
 CONTACT RESISTANCE: Not more than 30mΩ (initial)
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 125V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 100K cycles

MODEL NO: MS-104-01
 MS-104-02

TOLERANCE	UNIT: MM	DWN.	<i>hoo</i>
UP TO 1.0:±0.1	SCALE: 3:1	CHK'D.	<i>hoo</i>
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	<i>hoo</i>
OVER 10.0:±0.3	DRWG NO:		

