SCHEMATIC



P.C.B.LAYOUT

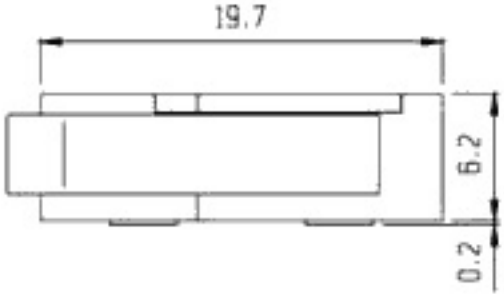

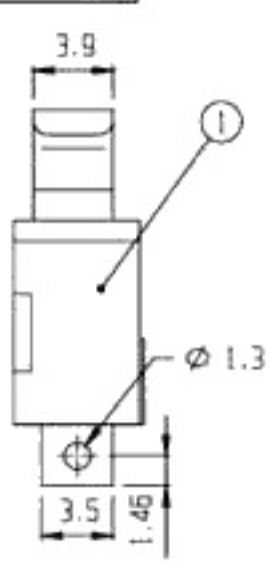

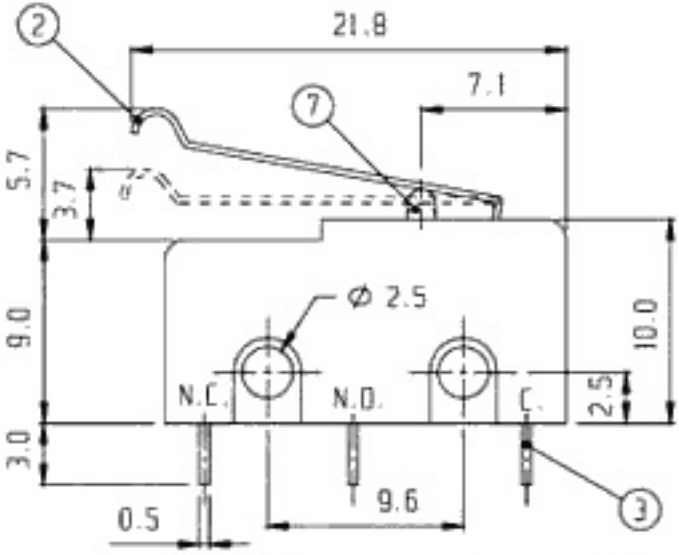

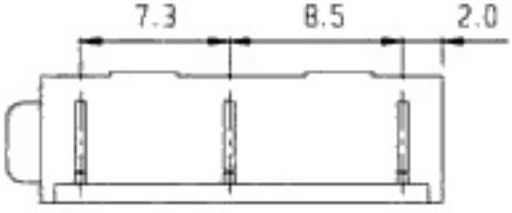

RoHS Compliance

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	PUSH BOTTON	P O M	1						
5	CONTACT POINT	Ag	1		6	SPRING PLATE	P B S	1	
3	TERMINAL	BRASS	3	Ag PLATED	4	CONTACT	P B S	1	
1	FRAME	P O M	1		2	KNOB	S U S	1	

ISSUED	SPECIFICATION	TITLE: MICRO SWITCH			
	RATING: AC 125V 1A	MODEL NO: MS-112			
	CONTACT RESISTANCE: Not more than 30mΩ (initial)				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 125V for 1 minute	UP TO 1.0: ±0.1	SCALE: 3:1	CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0: ±0.2	VERSION: 4		
	SWITCHING LIFE: 100K cycles	OVER 10.0: ±0.3	DRWG NO:	APPD.	