
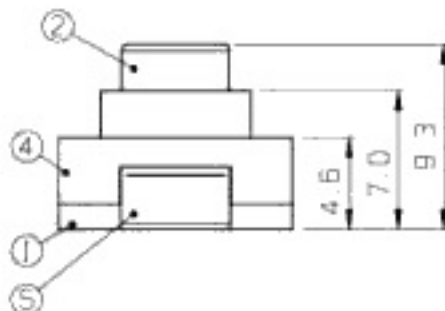


RoHS  
Compliance

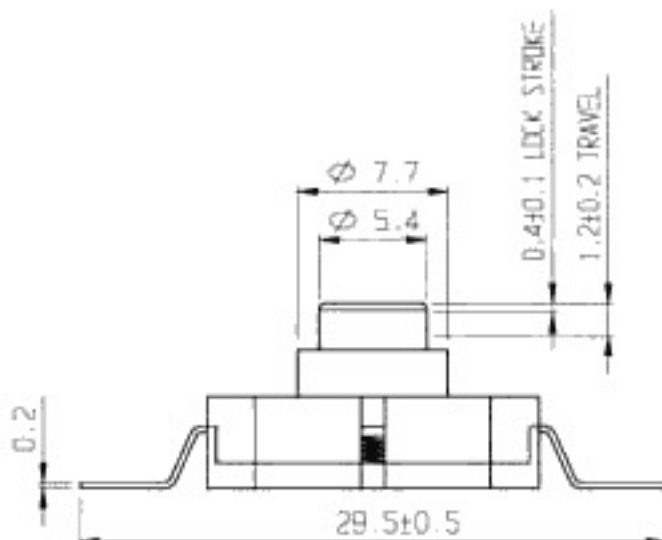

7	CONTACT	S P C C	1	Ag PLATED					
5	TERMINAL	BRASS	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	KNOB2	P O M	1		4	COVER	NYLON	1	
1	FRAME	NYLON	1		2	KNOB1	P O M	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH  
(LOCK)

RATING: DC 30V 1A  
 CONTACT RESISTANCE: 70mΩ max.  
 INSULATION RESISTANCE: 100MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 250V for 1 minute.  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-11B03

TOLERANCE	UNIT: MM	DWN.	hoo
UP TO 1.0:±0.1	SCALE: 3:1	CHK'D.	mn
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	
OVER 10.0:±0.3	DRWG NO:		

