

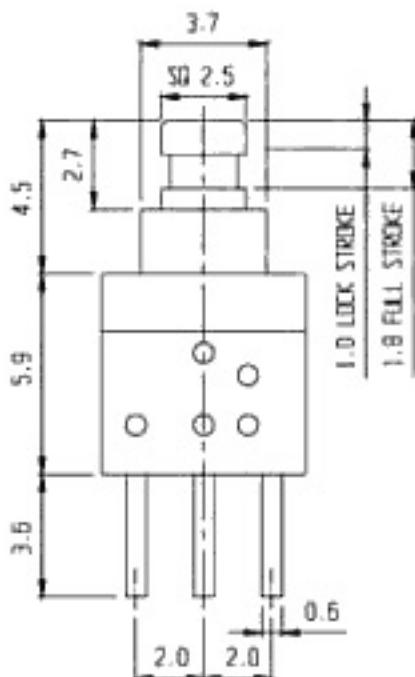




Non-shorting



RoHS Compliance

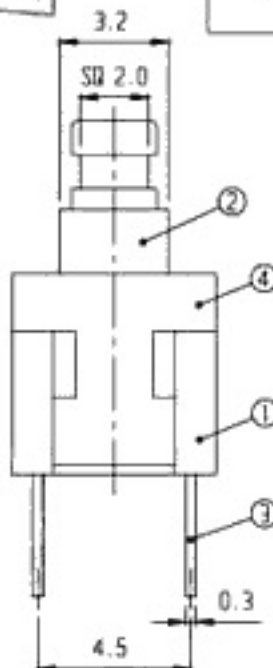

SCHEMATIC



PCB LAYOUT

7	HOOK	S U S	1					
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1
1	FRAME	NYLON	1	HB	2	KNOB	P O M	1
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY
								REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH (2P2T)
(LOCK)

RATING: DC 30V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 250V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-22D06L

TOLERANCE	UNIT: MM	DWN.	<i>h</i>
UP TO 1.0:±0.1	SCALE: 5:1	CHK'D.	<i>m</i>
1.0 TO 10.0:±0.2	VERSION: 01	APPD.	<i>[Signature]</i>
OVER 10.0:±0.3	DRWG NO:		

