




SCHMATIC

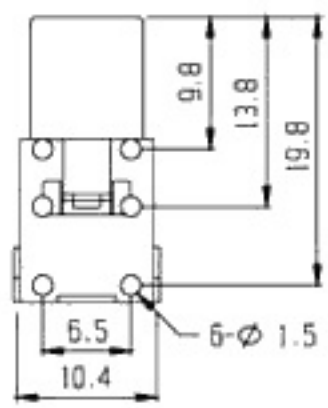

PCB LAYOUT

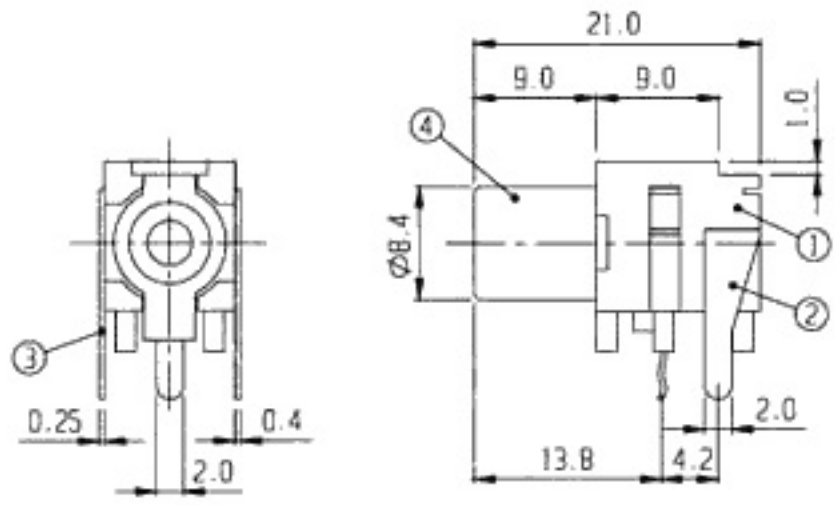

RoHS Compliance

3	CONTACT	P B S	1	Ag PLATED	4	FRAME	SPCC	1	Ni PLATED
1	FRAME	P O M	1		2	TERMINAL	BRASS	1	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED                      SPECIFICATION                      TITLE:                      RCA JACK



RATING: DC 30V 0.3A		MODEL NO: RCA-001B	
CONTACT RESISTANCE: 50mΩ max.		TOLERANCE	UNIT: MM
INSULATION RESISTANCE: 100MΩ AT 500V DC		UP TO 1.0:±0.1	SCALE: 2:1
WITHSTAND VOLTAGE: AC 500V for 1 minute		1.0 TO 10.0:±0.2	VERSION: 02
OPERATION FORCE: REFER ATTACH SPECIFICATION		OVER 10.0:±0.3	DRWG NO:
SWITCHING LIFE: 5K cycle min.			

DWN. *hro*  
CHK'D. *hm*  
APPD. *[Signature]*