



SCHMATIC



PCB LAYOUT

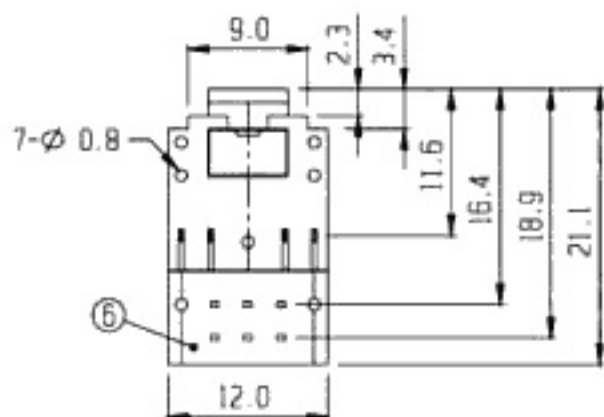

RoHS  
Compliance

| NO. | PART     | MATERIAL | QTY | REMARKS   | NO. | PART          | MATERIAL     | QTY | REMARKS   |
|-----|----------|----------|-----|-----------|-----|---------------|--------------|-----|-----------|
| 7   | CONTACT  | BRASS    | 2   | Ag PLATED |     |               |              |     |           |
| 5   | TERMINAL | BRASS    | 6   | Ag PLATED | 6   | TERMINAL BASE | PHENOL RESIN | 1   | NATURAL   |
| 3   | CONTACT  | S U S    | 2   | Ag PLATED | 4   | SHEATH        | BRASS        | 1   | Ni PLATED |
| 1   | FRAME    | P O M    | 1   |           | 2   | TERMINAL      | P B S        | 1   | Ag PLATED |

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK (1.3)



RATING: DC 30V 0.3A  
 CONTACT RESISTANCE: 50mΩ max.  
 INSULATION RESISTANCE: 100MΩ AT 500V DC  
 WITHSTAND VOLTAGE: AC 500V for 1 minute  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 5K cycles (15-18 cycles/min unloading)

MODEL NO: ST-35072

|                   |            |        |     |
|-------------------|------------|--------|-----|
| TOLERANCE         | UNIT: MM   | DWN.   | hso |
| UP TO 1.0: ±0.1   | SCALE: 2:1 | CHK'D. | hm  |
| 1.0 TO 10.0: ±0.2 | VERSION: 2 | APPD.  |     |
| OVER 10.0: ±0.3   | DRWG NO:   |        |     |