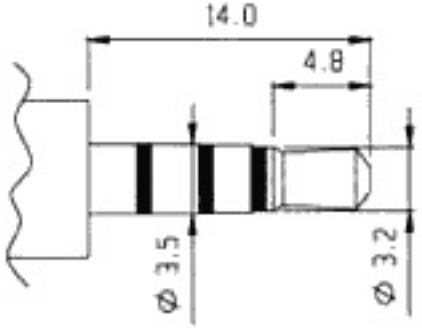

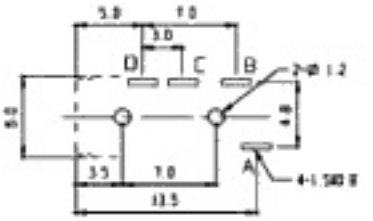

P.C.B.LAYOUT

SCHEMATIC



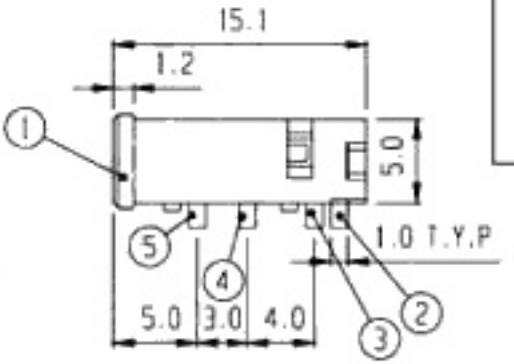

RoHS Compliance



NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
5	SPRING PLATE	CuBe	1	Ag-PLATING					
3	SPRING PLATE	CuBe	1	Ag-PLATING	4	SPRING PLATE	CuBe	1	Ag-PLATING
1	FRAME	NYLON	1		2	SPRING PLATE	P B S	1	Ag-PLATING

ISSUED	SPECIFICATION	TITLE: 3.5mm STERED JACK			
	RATING: DC 30V 0.3A	MODEL NO: ST-3574C			
	CONTACT RESISTANCE: 50mΩ max.				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2.5:1	CHK"D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01		
	SWITCHING LIFE: 5K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	