



TS40-R Sub-Miniature Rocker Switches



SPECIFICATIONS

CONTACT RATING: Q: 3A @120 VAC or 28 VDC (Q: terminal option)
 ELECTRICAL LIFE: 30,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20 mΩ max. initial @2-4 VDC, 100 mA
 INSULATION RESISTANCE: 1,000 MΩ min.
 DIELECTRIC STRENGTH: 1,500 V RMS @ sea level.
 OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS

CASE - diallyl phthalate (DAP)(UL94V-0)
 ACTUATOR- Nylon , black standard
 BUSHING - Copper alloy , nickel plated
 HOUSING - Stainless Steel
 CONTACT AND TERMINAL - Copper alloy
 SWITCH SUPPORT - Copper alloy , tin-plated

How do you build the switches you need!!

The RS-4 / RS-5 , please see the (A) ;

The RS-6/RS-7/RS-8/RS-9, please see the (B)

(A) **RS** - **4** - **R1** - **2** - **C** **Q** - **E** - **A5S** -

Switches Function		Actuator		Actuator Color		Termination		Epoxy seal		RoHS code	
RS-4	SP on-none-on	R1	7.62 width	1	white	B	solder lug	(none)	none seal	<input type="checkbox"/>	= none
RS-4B	SP on-none-(on)	R2	5.84 width	2	Black	C	P.C	E	epoxy seal	H	= RoHS Compliant
RS-4A	SP on-off-on			3	Red	D	wire wrap				
RS-4H	SP (on)-off-(on)			The other color is available for special inquires		Contact Material		Vertical support Bracket			
RS-4I	SP on-off-(on)					Q	silver plated	(none)			
RS-5	DP on-none-on					R	gold plated	A5	straight type		
RS-5B	DP on-none-(on)					G	gold over silver	A5S	snap-in type		
RS-5A	DP on-off-on					K	gold / tin				
RS-5H	DP (on)-off-(on)										
RS-5I	DP on-off-(on) <input type="checkbox"/>										
RS-5C	DP on-on-on										

(B) **RS** - **6** - **R2** - **2** - **Q** - **E** - **S** -

Horizon Right Angle	Vertical Right Angle	Switches Function	Actuator		Contact Material		Epoxy seal		RoHS code	
RS-6	RS-8	SP on-none-on	R1	7.62 width	Q	silver plated	(none)	none seal	<input type="checkbox"/>	= none
RS-6B	RS-8B	SP on-none-(on)	R2	5.84 width	R	gold plated	E	epoxy seal	H	= RoHS Compliant
RS-6A	RS-8A	SP on-off-on	Actuator Color		G	gold over silver	Support Bracket			
RS-6H	RS-8H	SP (on)-off-(on)	1	white	K	gold / tin	(none)	std. straight		
RS-6I	RS-8I	SP on-off-(on)	2	Black			S	snap-in type		
RS-7	RS-9	DP on-none-on	3	Red						
RS-7B	RS-9B	DP on-none-(on)	The other color is available for special inquires							
RS-7A	RS-9A	DP on-off-on								
RS-7H	RS-9H	DP (on)-off-(on)								
RS-7I	RS-9I	DP on-off-(on) <input type="checkbox"/>								
RS-7C	RS-9C	DP on-on-on								

INDEX

TOGGLE

ROCKER

SLIDE

PUSHBUTTON

DIP




TACT

TS40-R Sub-Miniature Rocker Switches

SPDT



Model No.	Switching position		
RS-4	ON	none	ON
RS-4A	ON	OFF	ON
RS-4B	ON	None	(ON)
RS-4H	(ON)	OFF	(ON)
RS-4I	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1






RS-4 - R1-2-BQ

DPDT



Model No.	Switching position		
RS-5	ON	none	ON
RS-5A	ON	OFF	ON
RS-5B	ON	None	(ON)
RS-5H	(ON)	OFF	(ON)
RS-5I	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
RS-5C	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4







RS-5 - R1-2-BQ

SPDT



Model No.	Switching position		
RS-6	ON	none	ON
RS-6A	ON	OFF	ON
RS-6B	ON	None	(ON)
RS-6H	(ON)	OFF	(ON)
RS-6I	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1







RS-6 - R2-2-Q / RS-6-R2-2-Q-S

DPDT




Model No.	Switching position		
RS-7	ON	none	ON
RS-7A	ON	OFF	ON
RS-7B	ON	None	(ON)
RS-7H	(ON)	OFF	(ON)
RS-7I	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
RS-7C	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4







RS-7 - R1-2-Q / RS-7-R1-2-Q-S

SPDT




Model No.	Switching position		
RS-8	ON	none	ON
RS-8A	ON	OFF	ON
RS-8B	ON	None	(ON)
RS-8H	(ON)	OFF	(ON)
RS-8I	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1


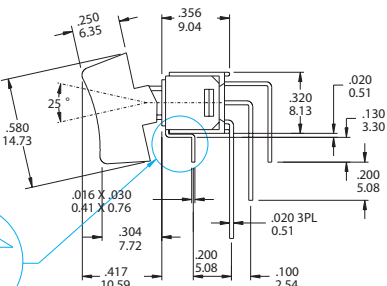




RS-8 - R1-2-Q / RS-8-R1-2-Q-S

DPDT



Model No.	Switching position		
RS-9	ON	none	ON
RS-9A	ON	OFF	ON
RS-9B	ON	None	(ON)
RS-9H	(ON)	OFF	(ON)
RS-9I	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
RS-9C	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

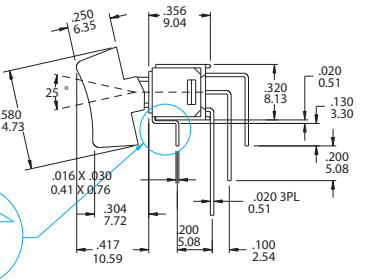

RS-9 - R1-2-Q / RS-9-R1-2-Q-S

INDEX

TOGGLE

ROCKER

SLIDE

PUSH BUTTON

DIP

TACT

TS40-R Sub-Miniature Rocker Switches

Actuator Option			Actuator Color Option								
R1			<table border="1"> <thead> <tr> <th>Code</th> <th>Color</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>White</td> </tr> <tr> <td>2</td> <td>Black(std.)</td> </tr> <tr> <td>3</td> <td>Red</td> </tr> </tbody> </table>	Code	Color	1	White	2	Black(std.)	3	Red
Code	Color										
1	White										
2	Black(std.)										
3	Red										
R2			Other colors, custom actuator marking available consult factory.								

TERMINAL OPTION (ONLY FOR THE RS-4/RS-5)

B Solder Lug(STD)	C PRINTED CIRCUIT	D Wire Wrap	DPDT

TERMINAL OPTION (ONLY FOR THE RS-4/RS-5)

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
Q	Silver plated	Silver plated	3 A @ 120V AC or 28 V DC; 1.5 A @ 250 VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX
G	Gold plated over silver plated	Gold plated over silver plated	0.4 VA MAX @ 20 V AC or DC MAX or 3 A @ 120V AC or 28 V DC; 1.5 A @ 250 VAC
K	Gold plated over nickel plated	Tin over nickel plated	0.4VA MAX @ 20 V AC or DC MAX

* THE K option is only for some special item. Please inquire first when you need the "K" option

P.C.B MOUNTING DIMENSION

RS-4 (PC terminal)	RS-6	RS-8	RS-5(PC terminal)	RS-7	RS-9

VERTICAL SUPPORT BRACKET OPTION

only for the RS-4/RS-5 . If you need the vertical support bracket , please build the terminal option is "C" code

--	--	--	--	--

INDEX TOGGLE ROCKER SLIDE PUSHBUTTON DIP TACT