



A	新版图	/	2011.09.07
			L2M

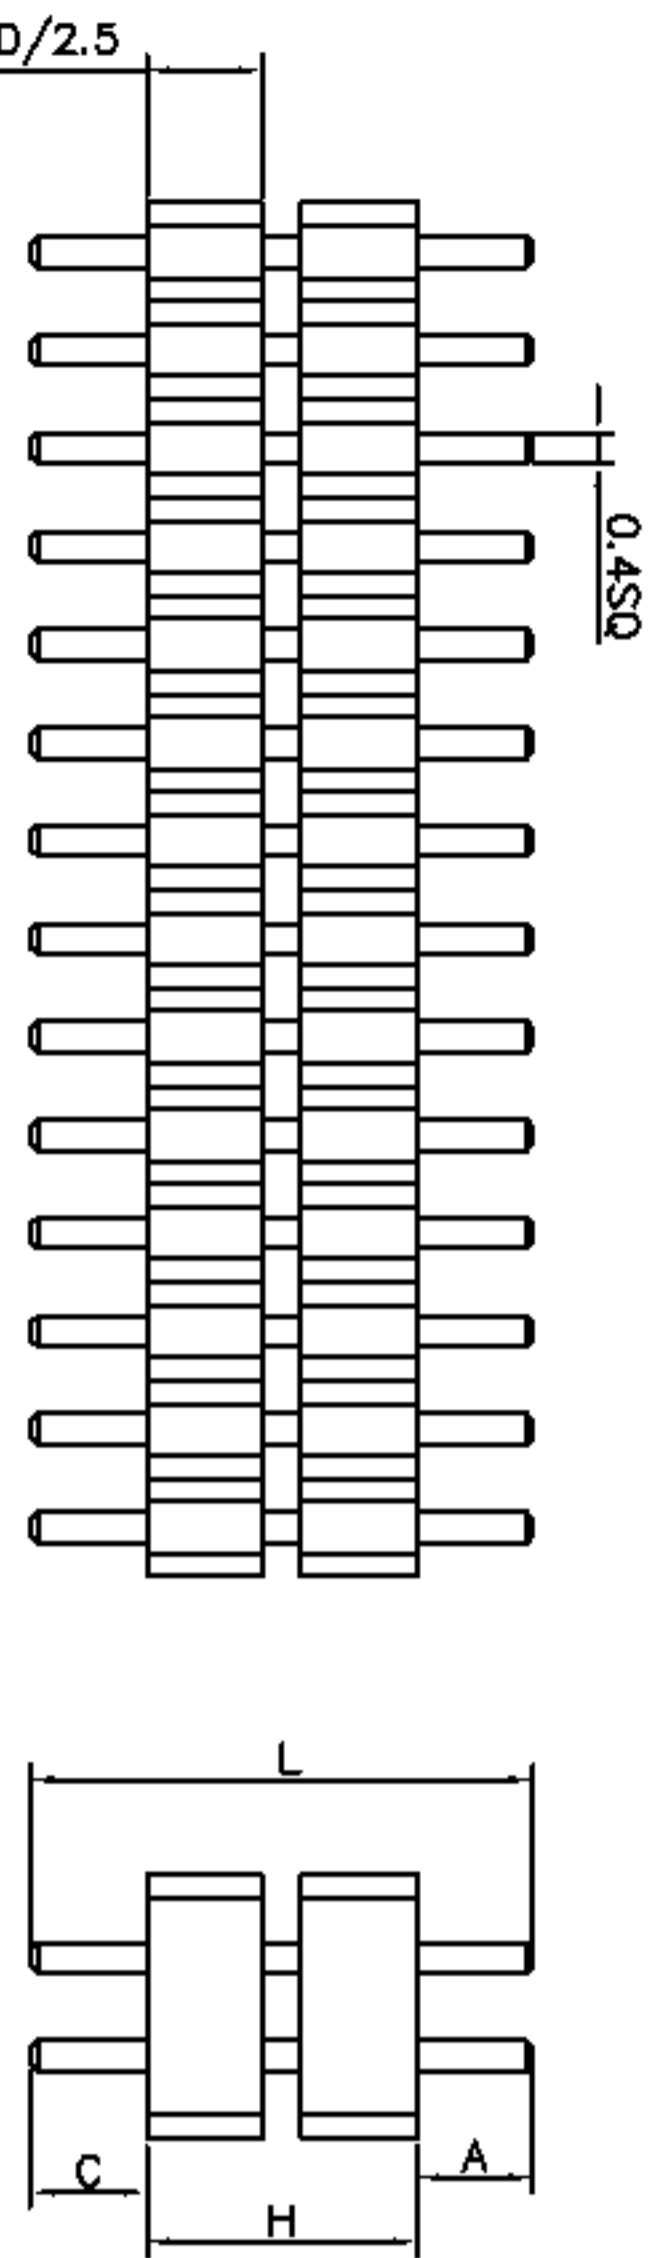

H、L、A、C的尺寸  
可依客户要求订做

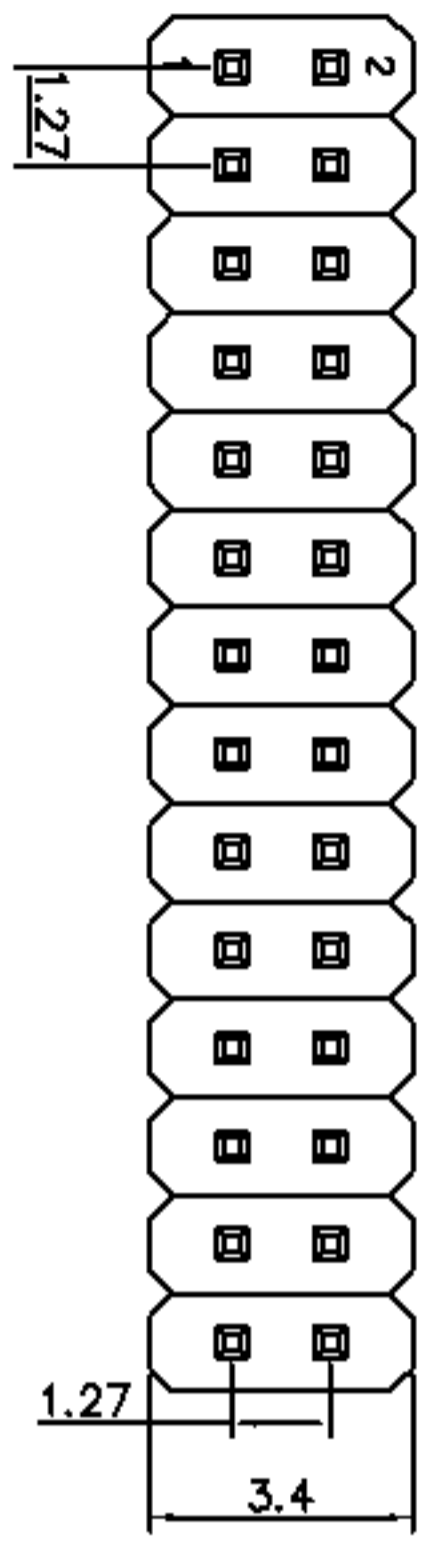

### PCB Layout

**Specification:**  
 Current Rating: 1 Ampere  
 Insulation Resistance : 1000M ohms Min.  
 Dielectric Withstanding : 300V AC  
 Contact Resistance: 20m ohms Max.  
 Operating temperature: -40° C to +105° C  
 Material:  
 Contact: Brass, Gold Flash or per Require  
 Housing: Nylon6T UL 94V-0



1101-4277R222XXB-H-L  
 1.27PIN距双塑胶双  
 排直式排针系列  
 A: 两排针排距2.54  
 B: 两排针排距1.27  
 每排PIN数  
 塑高  
 塑高

TOLERANCE		ANGLE
TOL		
ON		
.XXX =	0.05	
.XX =	0.15	1°
X -	0.20	2°
X. =	0.30	

DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
YSH	2011.09.07	
CHECKED	DATE	TITLE:
		排针系列-1.27*1.27PIN距-双排 双塑
CLIENT APPROVED	DATE	RFQ NO
		CLIENT P/N
		UNIT: mm
		SCALE: free
		FILE NO.: YH20120525A014