

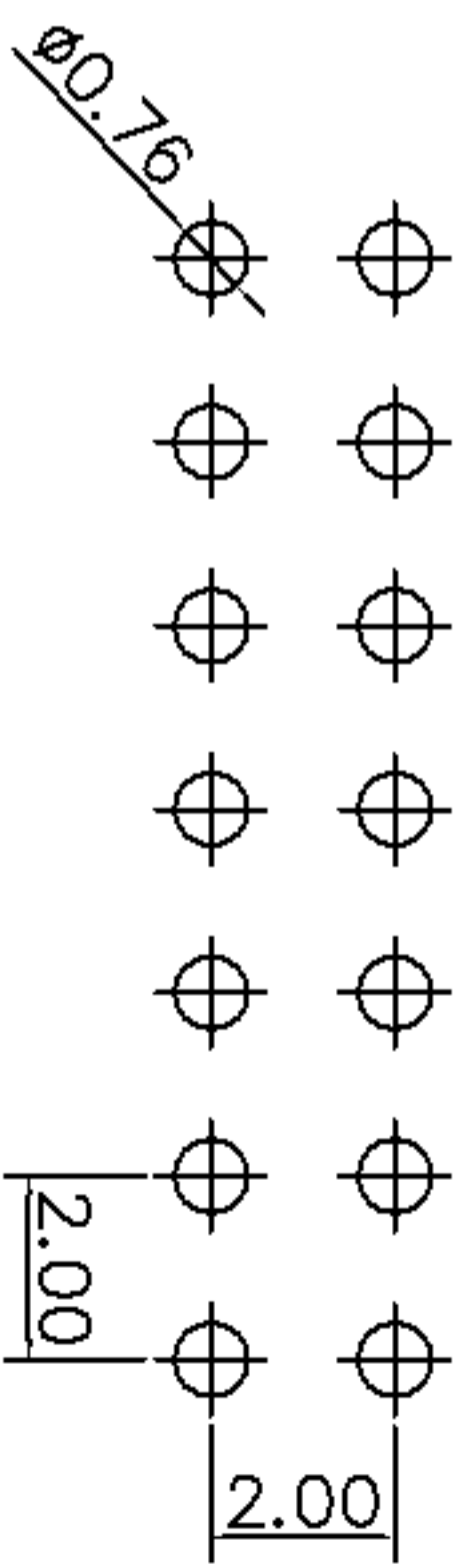


	A			
		新版图		
		/	2012.05.23	L2M

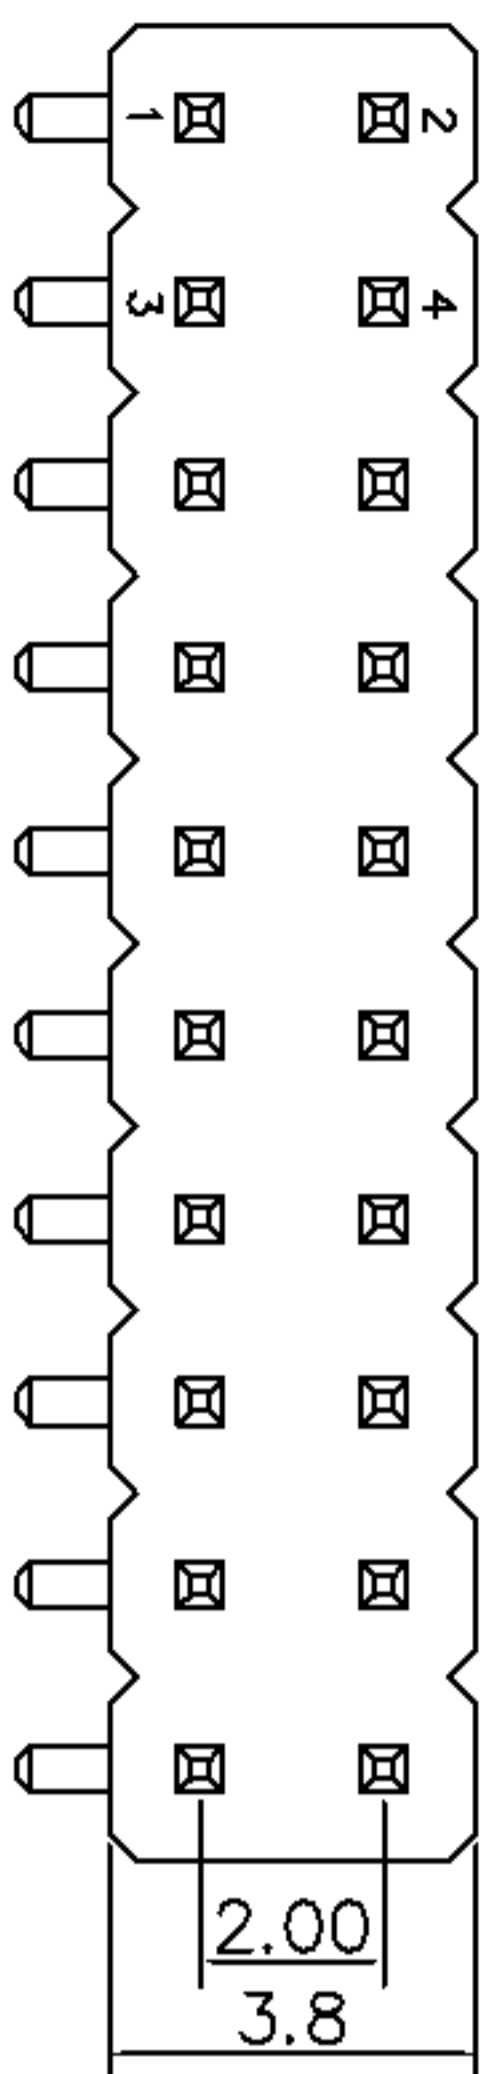

PCB Layout

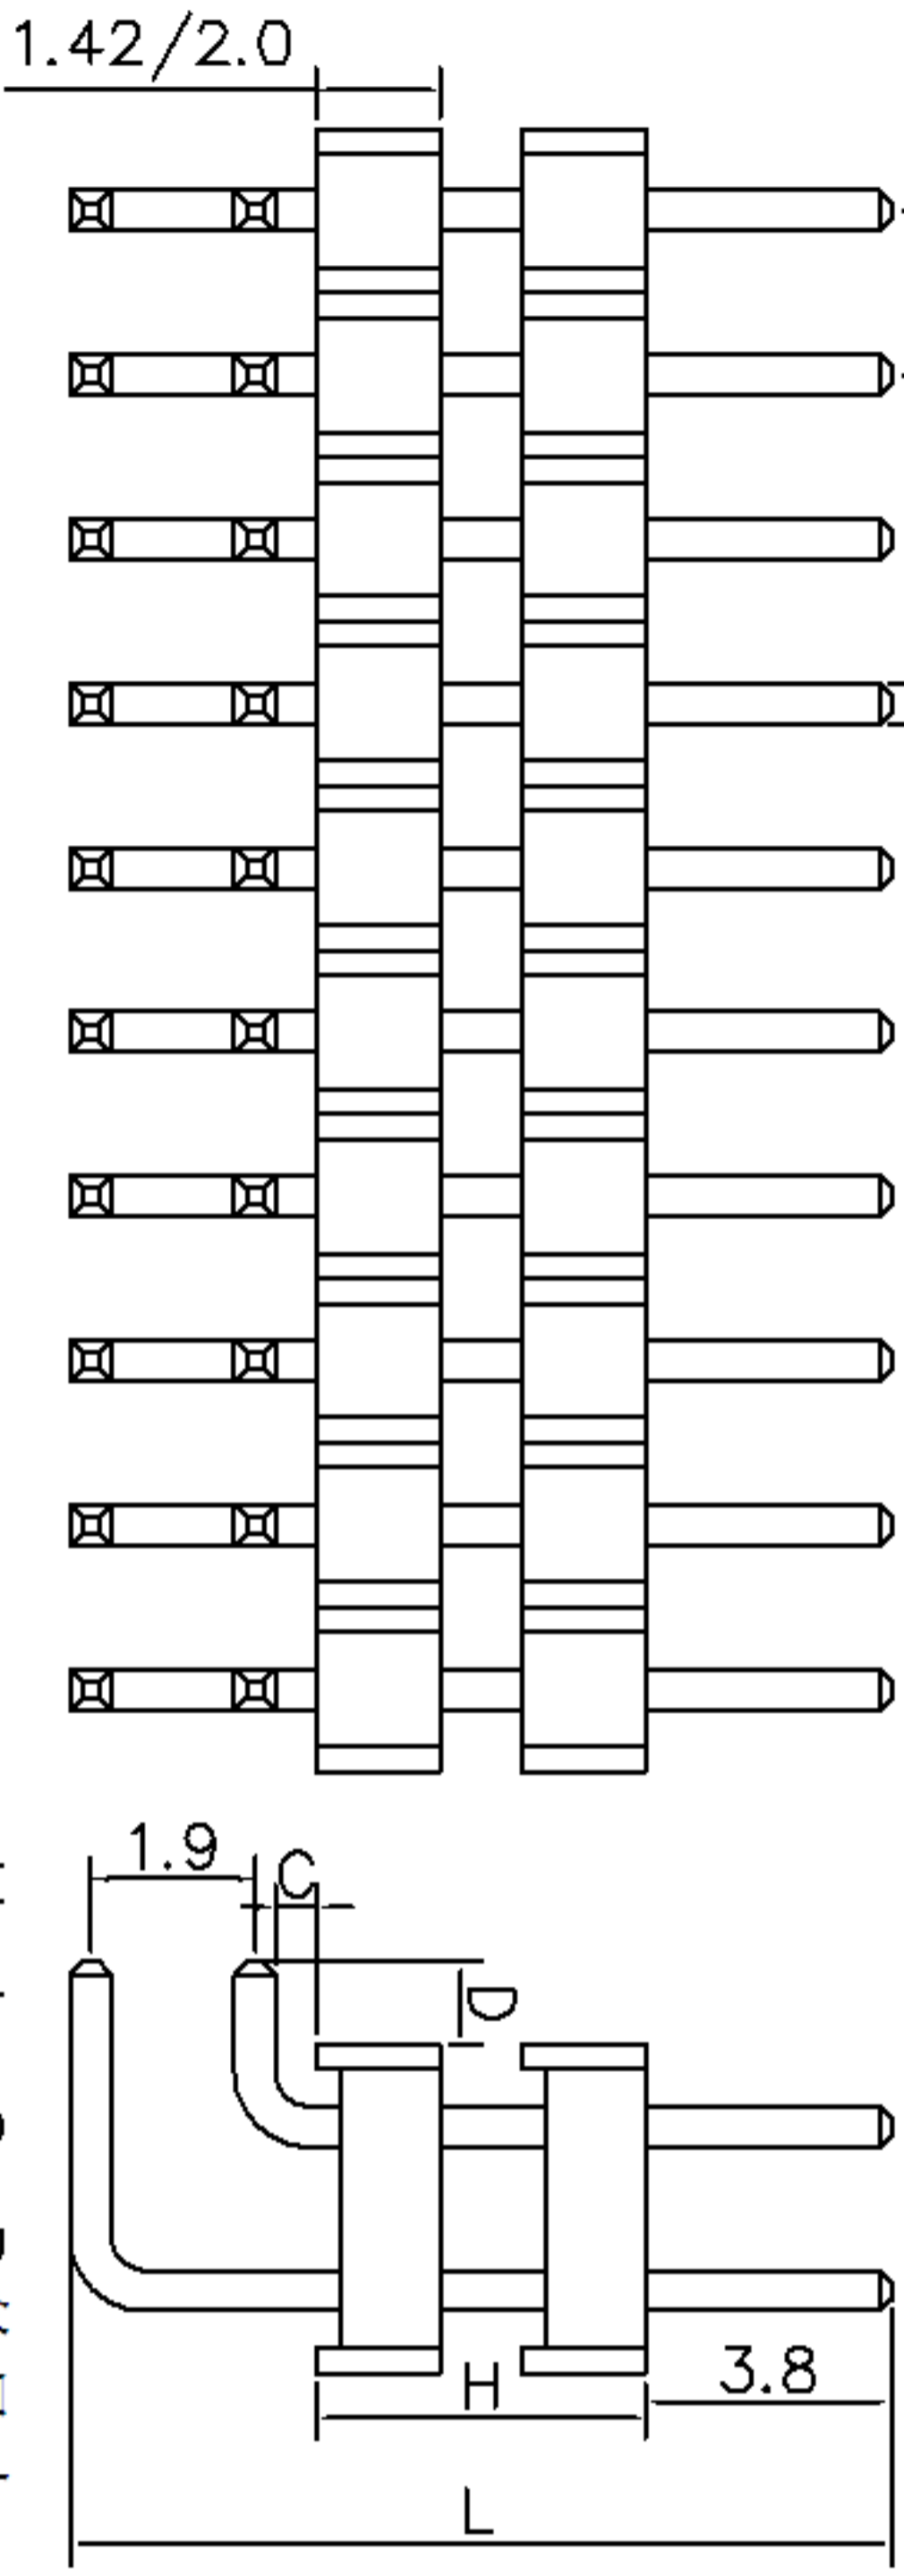

H、L、C、D的尺寸
可依客户要求订做

Technical Data:
 Material:
 Contact Material: Brass
 Insulator Material: PA66+30%GF
 Electrical:
 Current rating: 1.5Amps/Contact max.
 Contact resistance: <=20mohms/Contact
 Insulation resistance: >=1000Mohms at V=100V
 Withstanding Voltage: 450V AC/Minute
 Mechanical:
 Operating Temperature: Gold plated : -55° C~105° C
 Tin plated : -40° C~105° C
 Soldering Temperature: 260° C 10s Max.

1101-200R22XX-H-L
 2.0PIN距双塑胶双排
 弯式排针系列
 每排PIN数
 塑高
 总高

TOLERANCE		ANGLE		DRAWN	DATE	CHECKED	DATE	TITLE:
ON				YSH	2012.05.23			排针系列-2.00 PIN距-双排-双塑料弯针
.XXX±	0.05							
.XX ⊥	0.15		1°					
X ±	0.20		2°					
X ±	0.30							

CLIENT APPROVED	DATE	RFQ NO
CLIENT P/N	SCALE: free	
UNIT: mm		
FILE NO.: YH20120602A016		

