
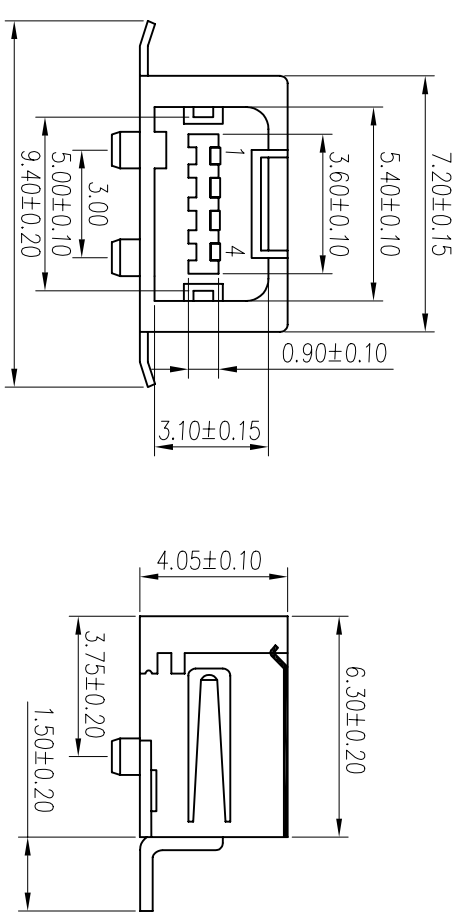


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
A1		材質變更	鐵殼材質由不銹鋼變更為磷銅	'04/12/02	Opfhaus	Meck

- Note:
- Material:
    - Insulator: L.C.P or PA46 UL 94-V0 rated.
    - Contact: Phosphor bronze,  $t=0.25\text{mm}$ .
    - Shell: Phosphor bronze,  $t=0.20\text{mm}$ .

- Specification:
  - Current rating: 1 A Max.
  - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
  - Contact resistance: 30 mΩ Max.
  - Insulation resistance: 1000 MΩ Min at DC 500V.
  - Total mating force: 24.5 Newtons Max.
  - Total unmating force: 4.9 Newtons Min.
  - Temperature range:  $-55^{\circ}\text{C}\sim+105^{\circ}\text{C}$

- Finishes:
  - Contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
  - Shell: Tin Plated.

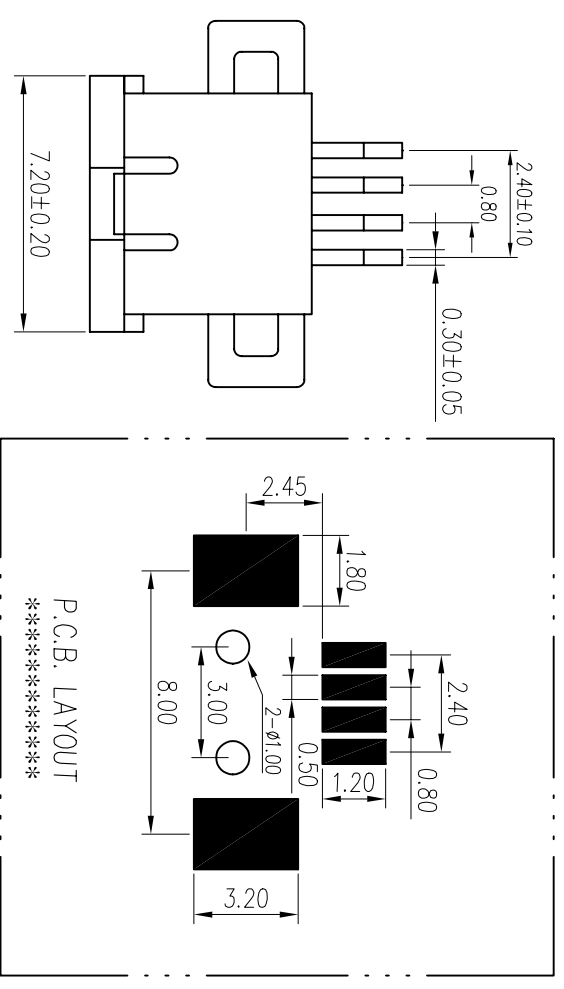

No.	Name	Qty	Material	Remarks & Thickness	Finish
3	Shell	1	Phosphor bronze	T=0.20mm	Tin Plated
2	Contact	4	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	L.C.P or PA46	UL 94-V0	Black/Ivory

PART NO:		MATERIAL:	
MODEL NO:		FINISH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		PART NAME:	
x	±0.3	MINIUSB-A(HRS) TYPE(F) S.M.(單面防呆)	
.xx	±0.20	DR: 段林麗	DWG NO: S/A-327
.xxx	±0.100	CHK: Kevin	SCALE: 2:1
AVG.	±1	APP: Kent	SHEET: 1 of 1
		'06/05/05	REV: A1

