
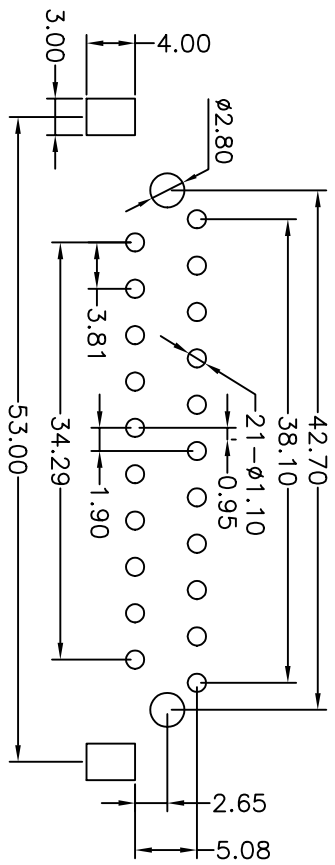
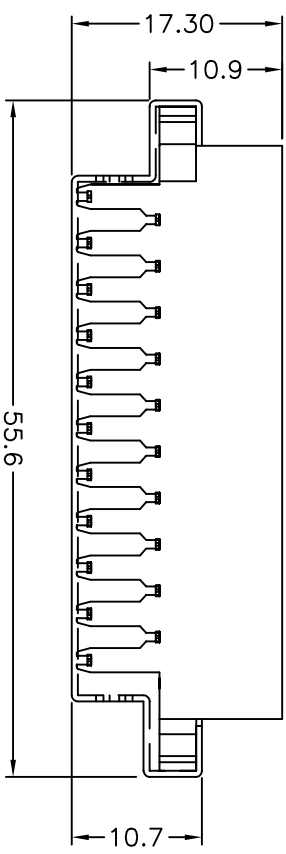
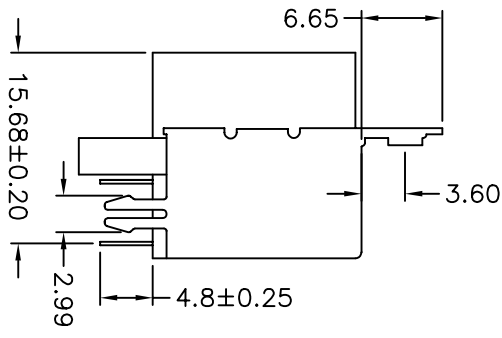


| REV. | NOTES | DATE |
|------|---------------------------------|------------|
| A | RELEASED | 2004/06/07 |
| B | ① $\phi 3$ 改為 M3, 16.00 改為 16.0 | 2004/10/09 |
| C | 修改圖面 | 2005/01/04 |

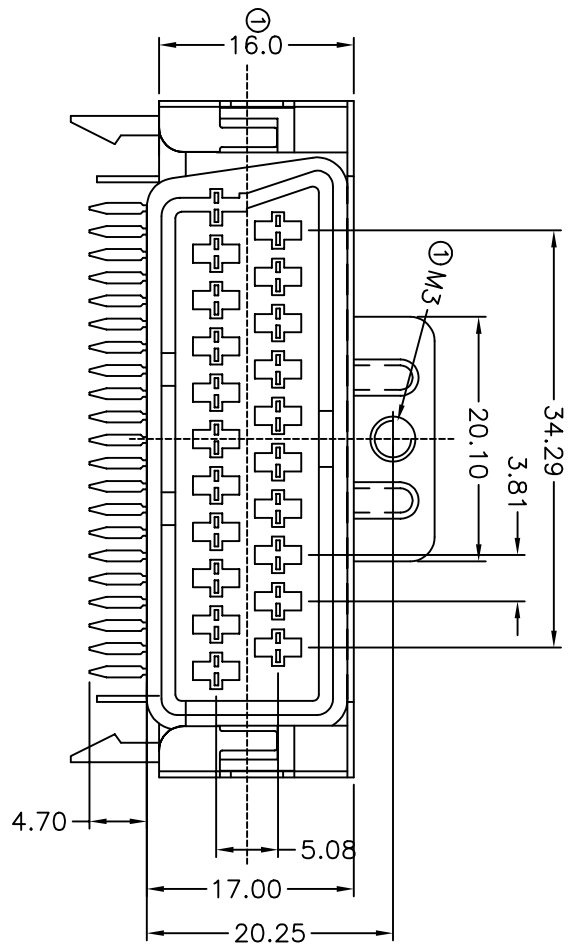

RECOMMEND P.C BOARD LAYOUT

- NOTES:
1. MATERIALS
- 1.1 Insulator: Pc
 - 1.2 Contact: Brass 0.3T
 - 1.3 Material sheel: SPCC 0.5T
 - 1.4 Contact Plating: TIN Plated
2. SPECIFICATIONS
- 2.1 Current Rating: 3.0Amp
 - 2.2 Dielectric Strength: 1000V AC for one minute
 - 2.3 Insulator Resistance: 1000M Ohms Min. (at 500V DC)
 - 2.4 Operation Temperature: -55°C to +105°C

| DIMENSIONS TOLERANCE | | METRIC | |
|----------------------|--|---------------|--|
| 0 = ±.5 | | 0 = ±.5 | |
| .00 = ±.20 | | .000 = ±.XXX | |
| .0000 = ±.XXX | | .0000 = ±.XXX | |
| ANG. = ±2° | | ANG. = ±2° | |

| 單位 (UNITS) | mm |
|-------------|----------|
| 數量 (QTY) | N/A |
| 材料 (MTR'L) | SEE NOTE |
| 處理 (FINISH) | SEE NOTE |
| 繪圖 (DRAW) | |

| 圖名 (NAME) | |
|------------|------------------------|
| 設計 (DE'N) | 90度母座有柱有孔錫 PC加鐵殼(有凸)M3 |
| 審核 (CHK) | |
| 核准 (APP'D) | |

| 料號 (PART NUMBER) | 圖號 (DRAW NUMBER) | 圖檔 (FILE NAME .DWG) | 比例 (SCALE) | 圖紙 (S/DWG) | 頁次 (SHEET) | 版次 (REV.) |
|------------------|------------------|---------------------|------------|------------|------------|-----------|
| ASC+0350-40C7 | RASCO035040C7 | | 1/1 | A4 | 1 | C |