
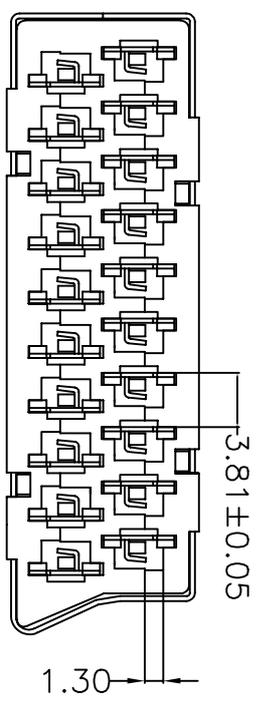
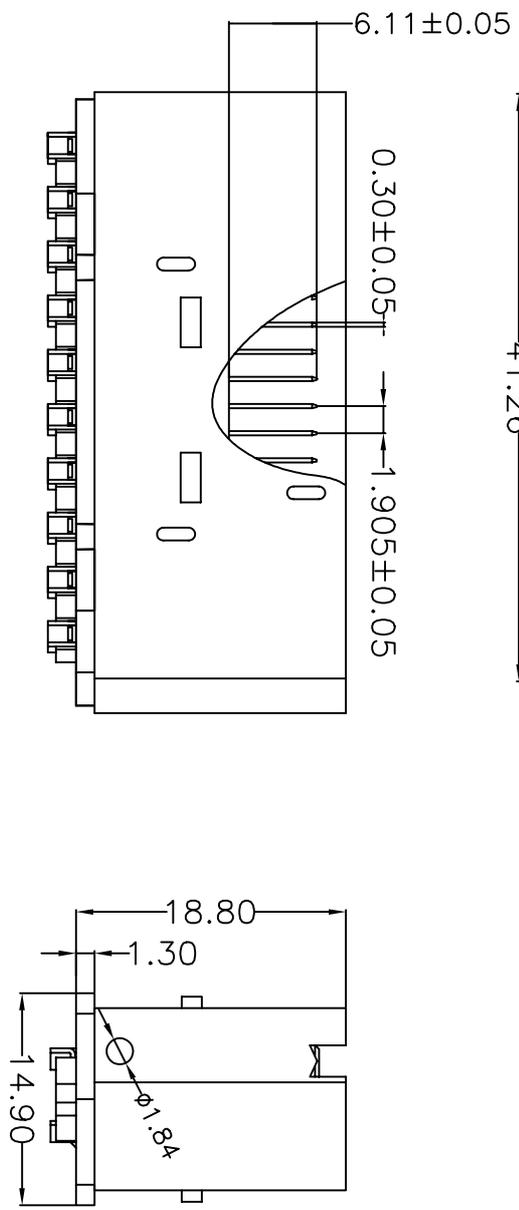


REV.	NOTES	DATE
A	RELEASED	2006/11/14

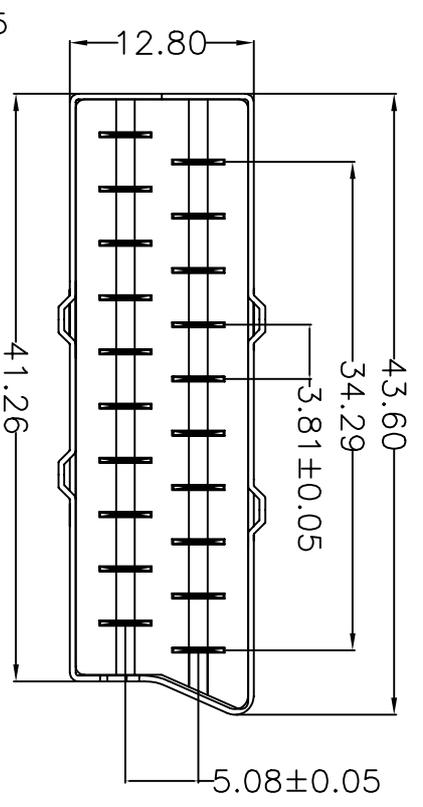

- NOTES:
- MATERIALS
 - Insulator: PBT
 - Contact: Brass, 0.3T, TIN PLATED.
 - Shell Stell: Brass or Stainless 430# 0.35T.
 - SPECIFICATIONS
 - Current Rating: 5Amp
 - Dielectric Strength: 1000V AC for one minute
 - Insulator Resistance: 5000MW Min. (at 500V DC)
 - Operation Temperature: -55°C to +105°C

DIMENSIONS TOLERANCE		單位 (UNITS)		mm
METRIC		數量 (QTY)	N/A	
0 = ±.20		材料 (M'T'L)	SEE NOTE	
.00 = ±.15		處理 (FINISH)	SEE NOTE	
.0000 = ±.0000		繪圖 (DRAW)		
ANG = ±2°		設計 (DE'N)		
		審核 (CHK)		
		核准 (APP'D)		

圖名 (NAME)		料號 (PART NUMBER)		ASC+0200-40B11	
成型滿PIN鍍PBT有鍍殼亮銀(鍍殼小點)無毒		圖號 (DRAW NUMBER)		RASC020040B11	
圖檔 (FILE NAME .DWG)		E:GCT/P/SC/3/300			
比例 (SCALE)	1/1	圖紙 (SHEET)	A4	頁次 (SHEET)	1
		版本 (REV.)			A