

# 4X8 IDC 线缆连接器 1811 系列

4 x 8 IDC cable connector 1811 Series



### Features

- 4 rows with 32 contacts
- Grid at 2mm spacing
- Be derived from IEC 61076-4-104

### Electrical

- Current rating: 1.5A at 20 , 1A at 70
- Contact resistance: 20m
- Insulation resistance: 10000 M
- Dielectric withstand voltage: 1000V.r.m.s.

### Mechanical

- Insertion force: 0.75N/pin
- Extraction force: 0.15N/pin
- Operating temperature: -55 ~ +125

### 特点


- 4排8列的线缆连接器
- 2mm网格间距
- 源自IEC61076-4-104标准

### 电气特性

- 额定电流: 1.5A at 20 , 1A at 70
- 接触电阻: 20 m
- 绝缘电阻: 10000 M
- 耐电压: 1000 V.r.m.s.

### 机械特性

- 插入力: 0.75 N/pin
- 拔出力: 0.15 N/pin
- 适用环境: -55 ~ +125

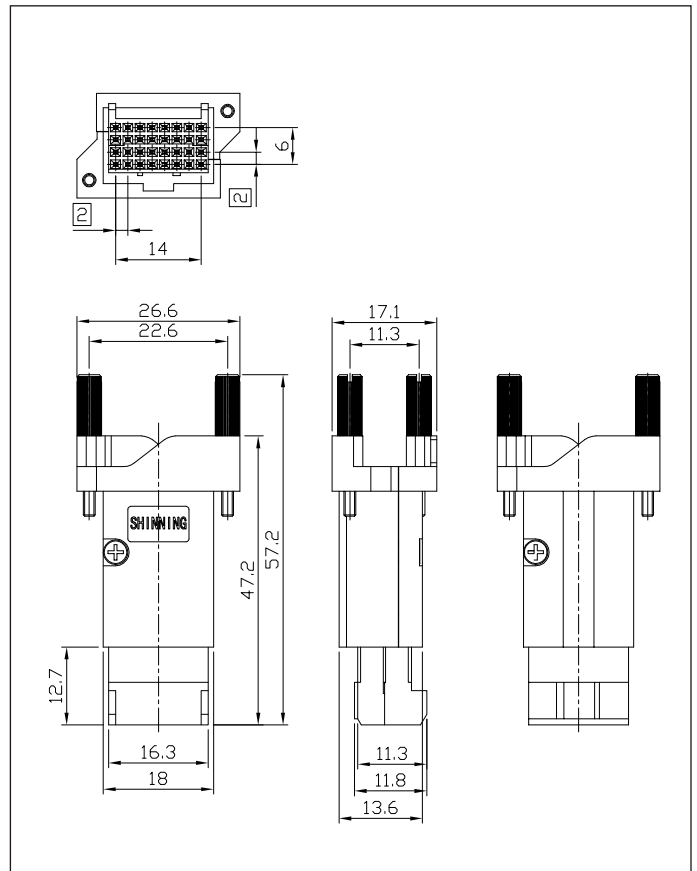

1811-408-XX-X

安装螺钉螺纹规格  
(Set screw thread standard)

- M3
  - #4-40UNC
- X. 客户指定 (Customer specifies)

电镀等级 (Grade of the plating)

代码(code)	触点镀层(Contacts plating)
2	GLASS I
3	GLASS II
4	GLASS III

线规号 (Wire gauge)

代码(code)	线规号(Wire gauge)
1	AWG24/26
2	AWG28/30

孔位分布为4排8列(The bore distributes  
of Bac to 4 rows x 8 lines)

屏蔽 (Shielding)

IDC系列代码 (IDC Series code)