


PCB布置图 (电镀后)

1:1

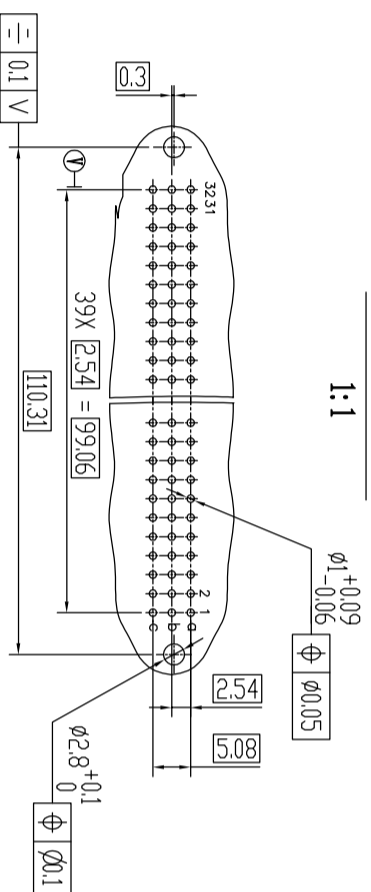

技术要求:

- 1.材料:
绝缘体: PBT+30%GF (UL94V-0)
引脚: 磷青铜 触点镀金0.4μm
压接区镀锡3~5μm
- 2.电气要求:
20° 时额定电流: 1.5A
温度范围: -55° ~ +125°
接触电阻: <20mΩ
绝缘电阻: >10⁸MΩ
耐电压: 1000V r.m.s
- 3.机械要求:
连接器每个触点的插拔力<0.94N
连接器每个触点的插拔力>0.15N

欧式连接器-R型直公短针
(3×40PIN-R) (压接型)

1832-340-12-0

0.1832.526

图样标记	版次	重量	比例
⊕	A0		2:1
共 1 张		第 1 张	