
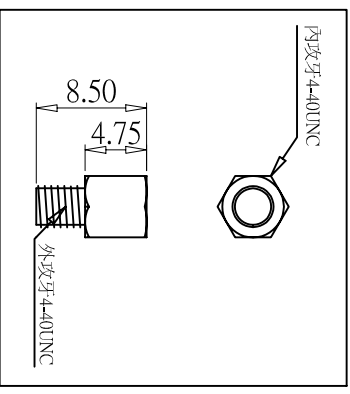
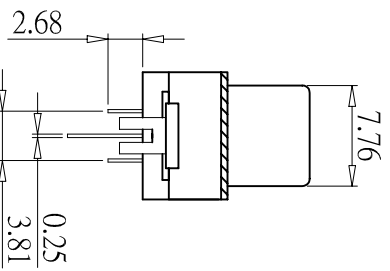
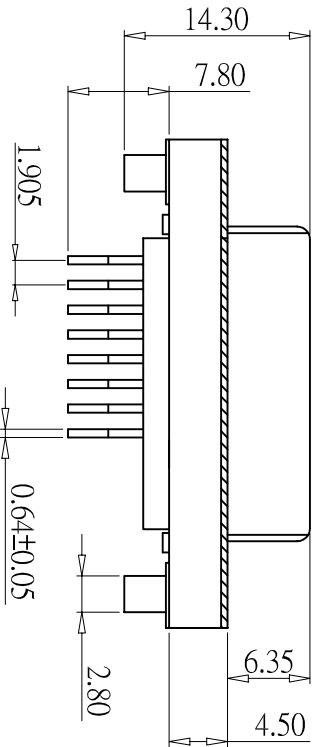


SALES FORMAT

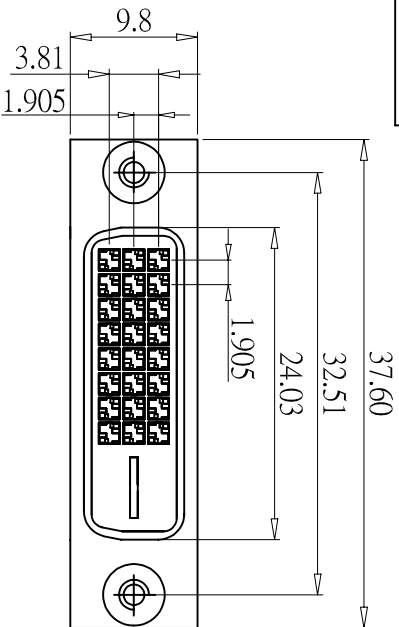

RoHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		05.06.19
A/1	變更一	物料編碼變更	06.05.09


***MATERIAL**
 BODY : PA66+30% UL 94V-0 RATED, COLOR: WHITE
 LATCH : PA66+30% UL 94V-0 RATED, COLOR: WHITE
 CONTACTS : BRASS
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT
 AREA TIN PLATING ON TERMINAL

***MECHANICAL**
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @25 MM/MINUTE
 DURABILITY: 100 MATING CYCLES

***ELECTRICAL SPECIFICATION**
 INSULATION RESISTANCE : 1000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ
 CURRENT RATING: 1.5 AMPERES MIN
 SHELL RESISTANCE:50 MIILOHMS MAX.INITIAL: 50 MIILOHMS
 MAX.CHANGE FROM INITIAL
 CONTOCT RESISTANCE : 20 MIILOHMS MAX.

***ENVIRONMENTAL**
 OPERATING TEMPERATURE : -20° TO 85°

***HOW TO ORDER**
 PART NUMBER :

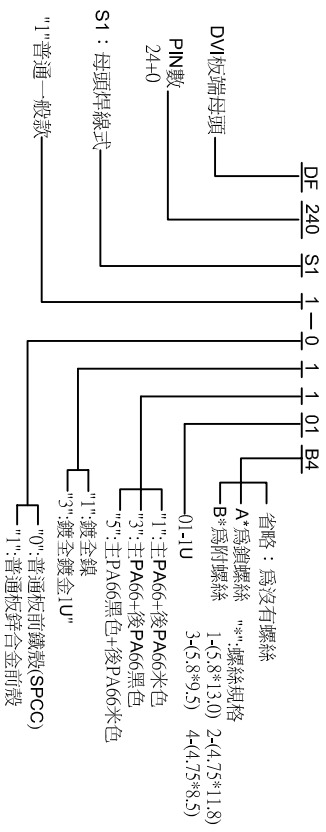

未標示公差尺寸值		DRAWN BY		FAN SHA	
METRIC		DESIGNED BY			
.0±0.35		APPROVAL BY			
.00±0.25		DRAW NO		COST-011	
.000±0.15		UNIT		mm	
TITLE: DV(24+0)母焊線式附4.75*8.50		SCALE		1:1	
PRODUCT NO: DF240S11-01101B4		REV		A/0	
FILE NO: ZK-3-D-001		REV		A/0	