

RoHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		05.06.19
A/1	變更一	物料編碼變更	06.05.09

***MATERIAL**
 BODY : PA66+30% UL 94V-0 RATED. COLOR: BLACK
 LATCH : PA66+30% UL 94V-0 RATED. COLOR: WHITE
 CONTACTS : BRASS
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT
 AREA TIN PLATING ON TERMINAL


***MECHANICAL**
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE
 DURABILITY: 100 MATING CYCLES

***ELECTRICAL SPECIFICATION**
 INSULATION RESISTANCE : 1000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ
 CURRENT RATING: 1.5 AMPERES MIN
 SHELL RESISTANCE: 50 MIILOHMS MAX.;INITIAL; 50 MIILOHMS
 MAX.CHANGE FROM INITIAL
 CONTOCT RESISTANCE : 20 MIILOHMS MAX.

***ENVIRONMENTAL**
 OPERATING TEMPERATURE : -20° TO 85°

***HOW TO ORDER**

PART NUMBER :

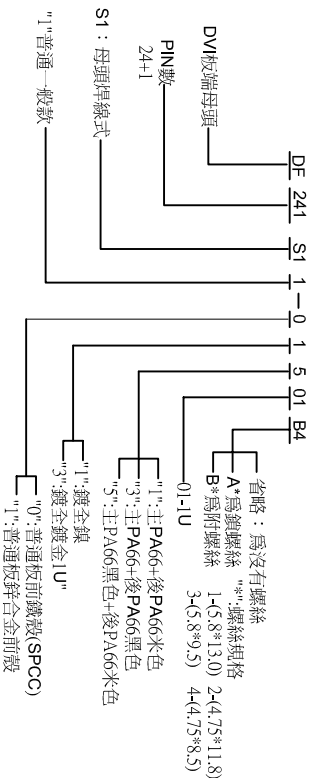

未標示公差尺寸值		DRAWN BY		FAN SHA	
METRIC		DESIGNED BY			
.0=±0.35	TITLE: DV(24+1)焊線式黑膠附4.75*11.80	APPROVAL BY			
.00=±0.25	PRODUCT NO: DF241S11-01501B4	DRAW NO		COSI-070	
.000=±0.15	FILE NO: ZK-3-D-001	UNIT		mm	
	SCALE 1:1	REV	A/0		