

RoHS

REV	DESCRIPTION	MODIFICATION	DATE
A0	新制定		05.06.19
A1	變更一	物料編碼變更	06.05.09

***MATERIAL**
 BODY : PA66+30% UL 94V-0 RATED. COLOR: BLACK
 LATCH : PA66+30% UL 94V-0 RATED. COLOR: WHITE
 CONTACTS : BRASS
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT
 AREA TIN PLATING ON TERMINAL


***MECHANICAL**
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE
 DURABILITY: 100 MATING CYCLES

***ELECTRICAL SPECIFICATION**
 INSULATION RESISTANCE : 1000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ
 CURRENT RATING: 1.5 AMPERES MIN
 SHELL RESISTANCE: 50 MILLOHMS MAX.;INITIAL; 50 MILLOHMS
 MAX.CHANGE FROM INITIAL
 CONTACT RESISTANCE : 20 MILLOHMS MAX.

***ENVIRONMENTAL**
 OPERATING TEMPERATURE : -20° TO 85°

***HOW TO ORDER**

PART NUMBER :

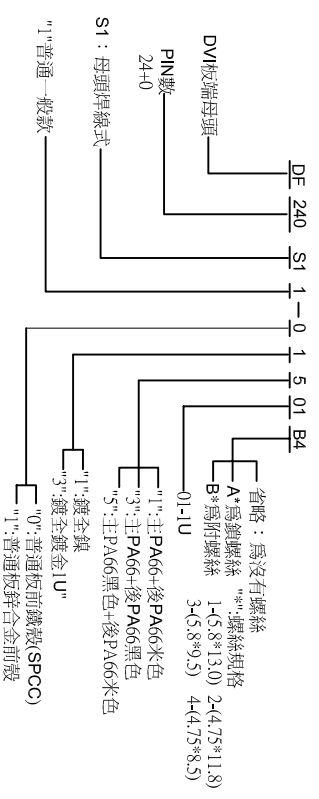

未標示公差尺寸值				DRAWN BY		FAN SHA	
METRIC				DESIGNED BY			
.0=±0.35				APPROVAL BY			
.00=±0.25				DRAW NO		COSI-069	
.000=±0.15				UNIT		mm	
TITLE:		DV(24+0)焊線式黑膠附4.75*11.80		SCALE		1:1	
PRODUCT NO:		DF240S11-01501B4		REV		A0	
FILE NO:		ZK-3-D-001		UNIT		mm	
SCALE		1:1		REV		A0	