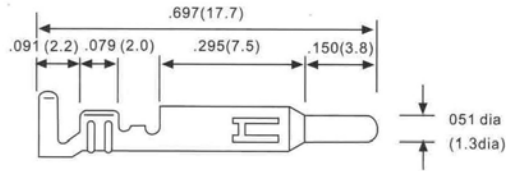
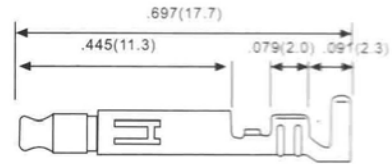


1030-1130 CONNECTOR

1030T



1130T



Specifications

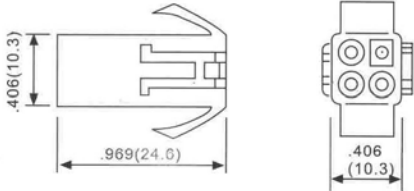
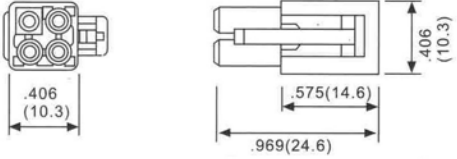
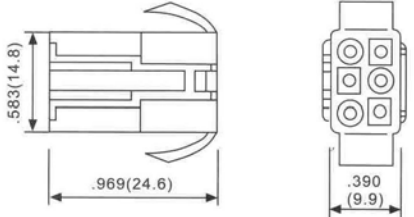
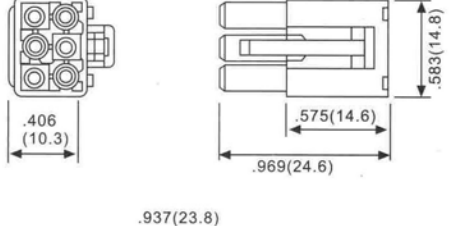
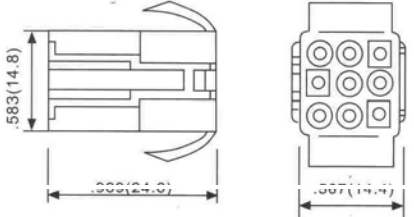
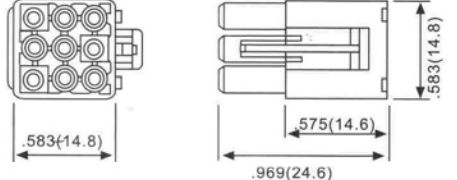
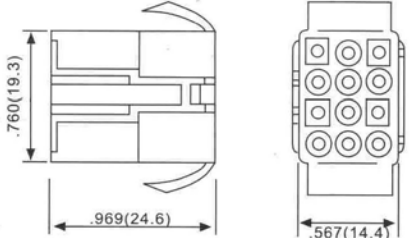

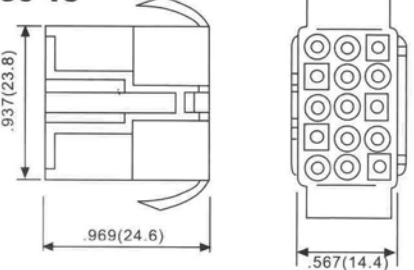
- Current rating: 10A AC, DC
- Voltage rating: 300V AC, DC
- Temperature range: -25°C ~ +90°C
(Including temperature rise)
- Contact resistance: initial value/7mΩ max
After environmental testing/10mΩ max.

- Insulation resistance: 1,000MΩ min
- Withstand voltage: 1,500V AC/min
- Applicable wires: AWG #20~#16
0.5~1.25mm²
- Applicable panel thickness: 0.031" ~ 0.079"
(0.8~2.0mm)

Unit: inch(mm)

- Integrally molded polarization
- Nylon66 UL 94V-0
- 2,3,4,6,9,12,15,circuit versions
- Positive locking
- Standard color:white

CIRCUITS	MAX RATEC		DIMENSIONAL INFORMATION	
	AMP	VOLT-AGE	PLUG	RECETACLE
2	10A	300V	1030-2 	1130-2
3	10A	300V	1030-3 	1130-3
4	10A	300V	1030-4-1 	1130-4-1

CIR CUITS	MAX RATEC		DIMENSIONAL INFORMATION			
	AMP	VOLT- AGE	PLUG		RECETACLE	
4	10A	300V	1030-4 		1130-4 	
6	8A	300V	1030-6 		1130-6 	
9	6A	300V	1030-9A 		1130-9A 	
12	6A	300V	1030-12 		1130-12 	
15	6A	300V	1030-15 		1130-15 