


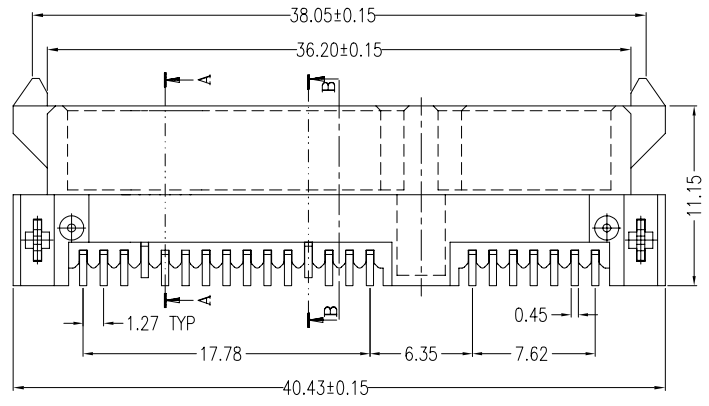




REV.	ECN.NO.	DATE
A	RELEASED	01/08-'07

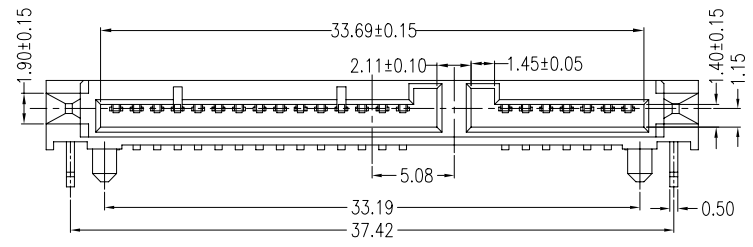

SECT A-A



SECT B-B

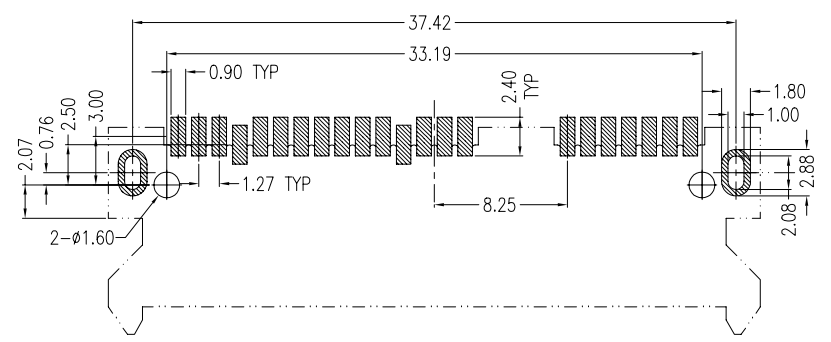

P.C.B LAYOUT (T=1.2)
TOP VIEW

Notes:

*Material

Housing: LCP, UL 94V-0 rated;
Color: Black.
Contact: Phosphor Bronze
Plating: Gold Plating over Nickel on contact area
Tin plating on solder Tail.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles


*Electrical Specification

Operation Voltage: 100 VAC max.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +125°C

*How to Order:

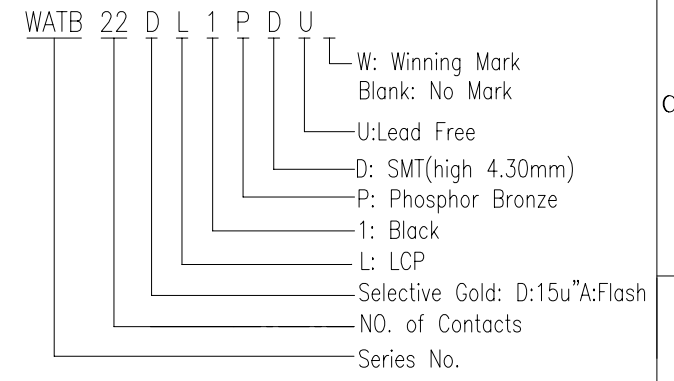

REV				Drawing By	Data				
Units	mm	Scale	2:1	WHL	01/15-'07	Date	01/08-'07	Sheet	1 of 1
Tolerance Unless Otherwise Specified				Reviewed By	Data	Title		WATB S ATA 7+15P 90°Female SMT Type(4.30mm)	
.X	~	±0.38		Jflee	01/15-'07	Third Angle Projection		Drawing No.	W070108
.XX	~	±0.25		Approval By	Data			REV	A
.XXX	~	±0.20		Richard	01/15-'07				
Angle	~	± 3°							